

# ALCOR - V

CNC Profile Machining and Cutting Center (11 Axis)

Operated by  
**FANUC**




ALCOR - V has been developed to perform cutting, surface treatment and end milling operations of wide aluminum and PVC profiles. ALCOR - V is designed to achieve the highest efficiency in the least amount of time with its units that can operate independently of each other.









8 fan-cooled spindle motors which can operate at different angles, offer unlimited processing on 4 surfaces of the profile.



Conveyor with 4 profile feeding capacity ensures the machine to work in the most efficient way.



550 mm diameter saw that can cut at any angle between 0° and 180° thanks to its 5-axis movement capability, the saw allows cutting and end-milling operations of profiles up to 320 mm wide.

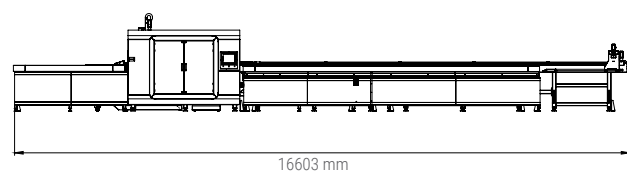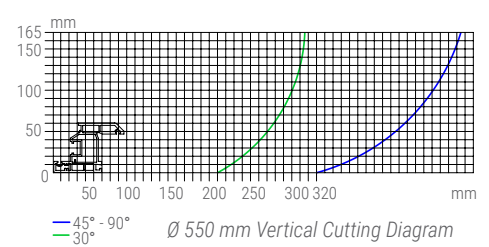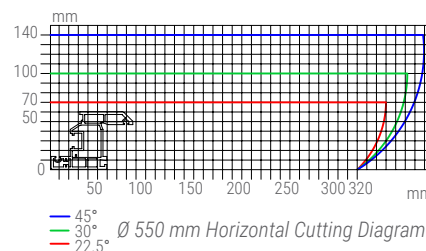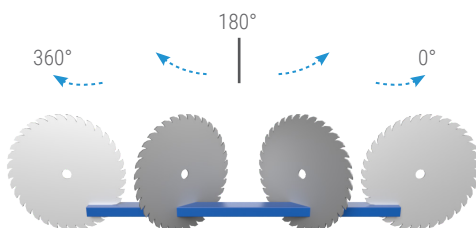

# ALCOR – V

CNC Profile Machining and Cutting Center (11 Axis)

## MACHINING AND CUTTING UNIT AXIS TRAVEL

X1 Axis (Processing Area Longitudinal)	400 mm
Y1 Axis (Processing Area Horizontal)	690 mm
Z1 Axis (Processing Area Vertical)	350 mm
X2 Axis (Cutting Unit Longitudinal)	560 mm
Y2 Axis (Cutting Unit Horizontal)	890 mm
Z2 Axis (Cutting Unit Vertical Movement)	510 mm
C Axis (Cutting Unit Horizontal Rotation Movement)	360°
A Axis (Cutting Unit Vertical Rotation Movement)	180°

## GRIPPER AXIS TRAVEL

XL Axis (Drive robot)	9950 mm
YL Axis (Gripper Y)	130 mm
ZL Axis (Gripper Z)	135 mm

## LOADING AND UNLOADING UNIT

Minimum profile loading length	1200 mm
Maximum profile loading length	8000 mm
Profile loading capacity	4
Adjustable Profile loading capacity (Max. 10)	○
Automatic chip discharge conveyor unit	●

## POSITIONING SPEED

X1 Axis (Processing Area Longitudinal)	40 m/min
Y1 Axis (Processing Area Horizontal)	40 m/min
Z1 Axis (Processing Area Vertical)	40 m/min
X2 Axis (Cutting Unit Longitudinal)	40 m/min
Y2 Axis (Cutting Unit Horizontal)	40 m/min
Z2 Axis (Cutting Unit Vertical Movement)	42 m/min
C Axis (Cutting Unit Horizontal Rotation Movement)	166°/sec.
A Axis (Cutting Unit Vertical Rotation Movement)	166°/sec.
U Axis (Cutting Unit Movable Clamp)	40 m/min
XL Axis (Drive robot)	90 m/min
YL Axis (Gripper Y)	20 m/min
ZL Axis (Gripper Z)	20 m/min

## AIR - ELECTRIC

Pressure	6-8 Bar
Maximum power	43,5 kW
Ampere	122 A

## CUTTING UNIT

Saw blade diameter	550 mm
Maximum profile cutting dimensions at 90° (width / height)	320/165
Saw blade motor power	3 kW

● Standard    ○ Optional

# ALCOR – V

CNC Profile Machining and Cutting Center (11 Axis)

## MILLING UNIT

Fan cooling spindles	8
Additional Fan Cooled Spindles (max. 5 pcs.)	○
Maximum power	3 kW
Maximum speed	18000
Tool holder	ER 20

## CONTROL UNIT

Industrial PC - Touchscreen	15"
Data transfer via remote network connection, Ethernet and USB	●
Barcode writer	●
Compatible with optimized cutting and machining list data	●
Compatibility with CAM programs	○
Camquix CAM software	●

## OPERATIONAL AREA

Automatic clamp positioning on X-axis	●
Automatic lubrication in processing area	●
Guard cabin for machining area	●
FESTO pneumatic system	○

● Standard    ○ Optional